


CAT.6A, S-FTP(PIMF), 4P*24AWG, PatchCord, XX M



PIN OUT

RJ45 8P8C PLUG

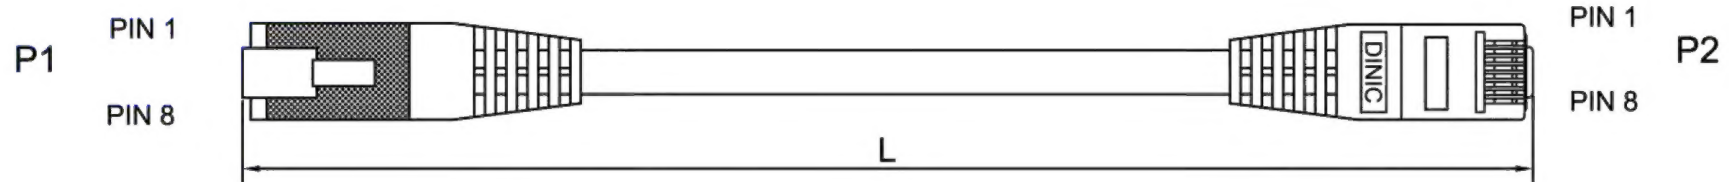

RJ45 8P8C PLUG

Specification:

1. CABLE:

CAT.6 S-FTP(PIMF) 4P*24AWG STRANDED,
LSZH Jacket O.D.=6.0mm.

2. CONNECTOR:

P1 & P2: RJ45, 8P8C, Shielded long plug, Gold-Plated Steel, Pin gold plated.

3. MOLDING TYPE:

Molding w/o cap

4. TEST:

(1)100% Open Short and miswire test.

(2)Insulation resistance 1 MΩ MIN.

5. Printing in Blue INK:

TYPE CM 60°C (UL) E188630 24AWG CSA LL81295 CMG 60°C FT4 ETL VERIFIED
TIA/EIA-568-B.2-10 CAT.6A Patch Cable S-FTP LSZH EVERNEW+ BATCH NO.

6. The tolerance of jumper length below 5 Meters is -10 to 50 mm , for
longer than 5 Meters is -10 to 200mm .

		SPECIFICATION	CAT.6A, S-FTP(PIMF), 4P*24AWG, PatchCord	REV.	1.0
UNIT	MM	CUSTOMER		DRAWN BY	Wang Qianqian
SCALE	1:1	NO.		CHECK BY	
PAGE	1/1	DRAW NO.		APPROVAL BY	